

For U.S.A.

NOTE: This equipment has been tested and found


WARNING:

• ONLY CONNECT 12 V DC CLASS 2 POWER SUPPLY (UL 1310/CSA 223) or LIMITED


POWER SOURCE (IEC/EN/UL/CSA 60950-1).

Preparations

Installation method	Mounting screw	Description of installation method
mount the camera onto the ceiling or wall ^{*1} there is a space for wiring in the ceiling or the wall)	M5 screws/ 4pcs.	【Type 1】
he camera to a junction box ^{*1} use metal junction boxes.	M4 screws/ 4pcs.*2	[Type 2]
he camera onto the ceiling or wall using the adapter prox. 510 g {1.13 lbs}) ^{*1} here is no space for wiring in the ceiling or the wall)	M5 screws/ 4pcs.	[Type 3]
the camera with WV-Q188/ WV-Q182 (Pole mount brack- bx. 1.2 kg {2.65 lbs}, option) or WV-Q189/ WV-Q183 mount bracket: approx. 1.3 kg {2.87 lbs}, option). ³	M5 screws/ 4pcs.	Refer to the oper- ating instructions of each bracket.

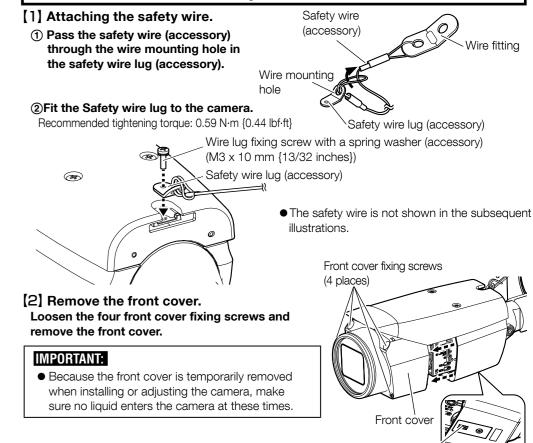

• When junction boxes or the like are used, it is recommended that 2 pieces be used side by side. (Securing the camera to one junction box and making connections to the other makes cable connections easy.)

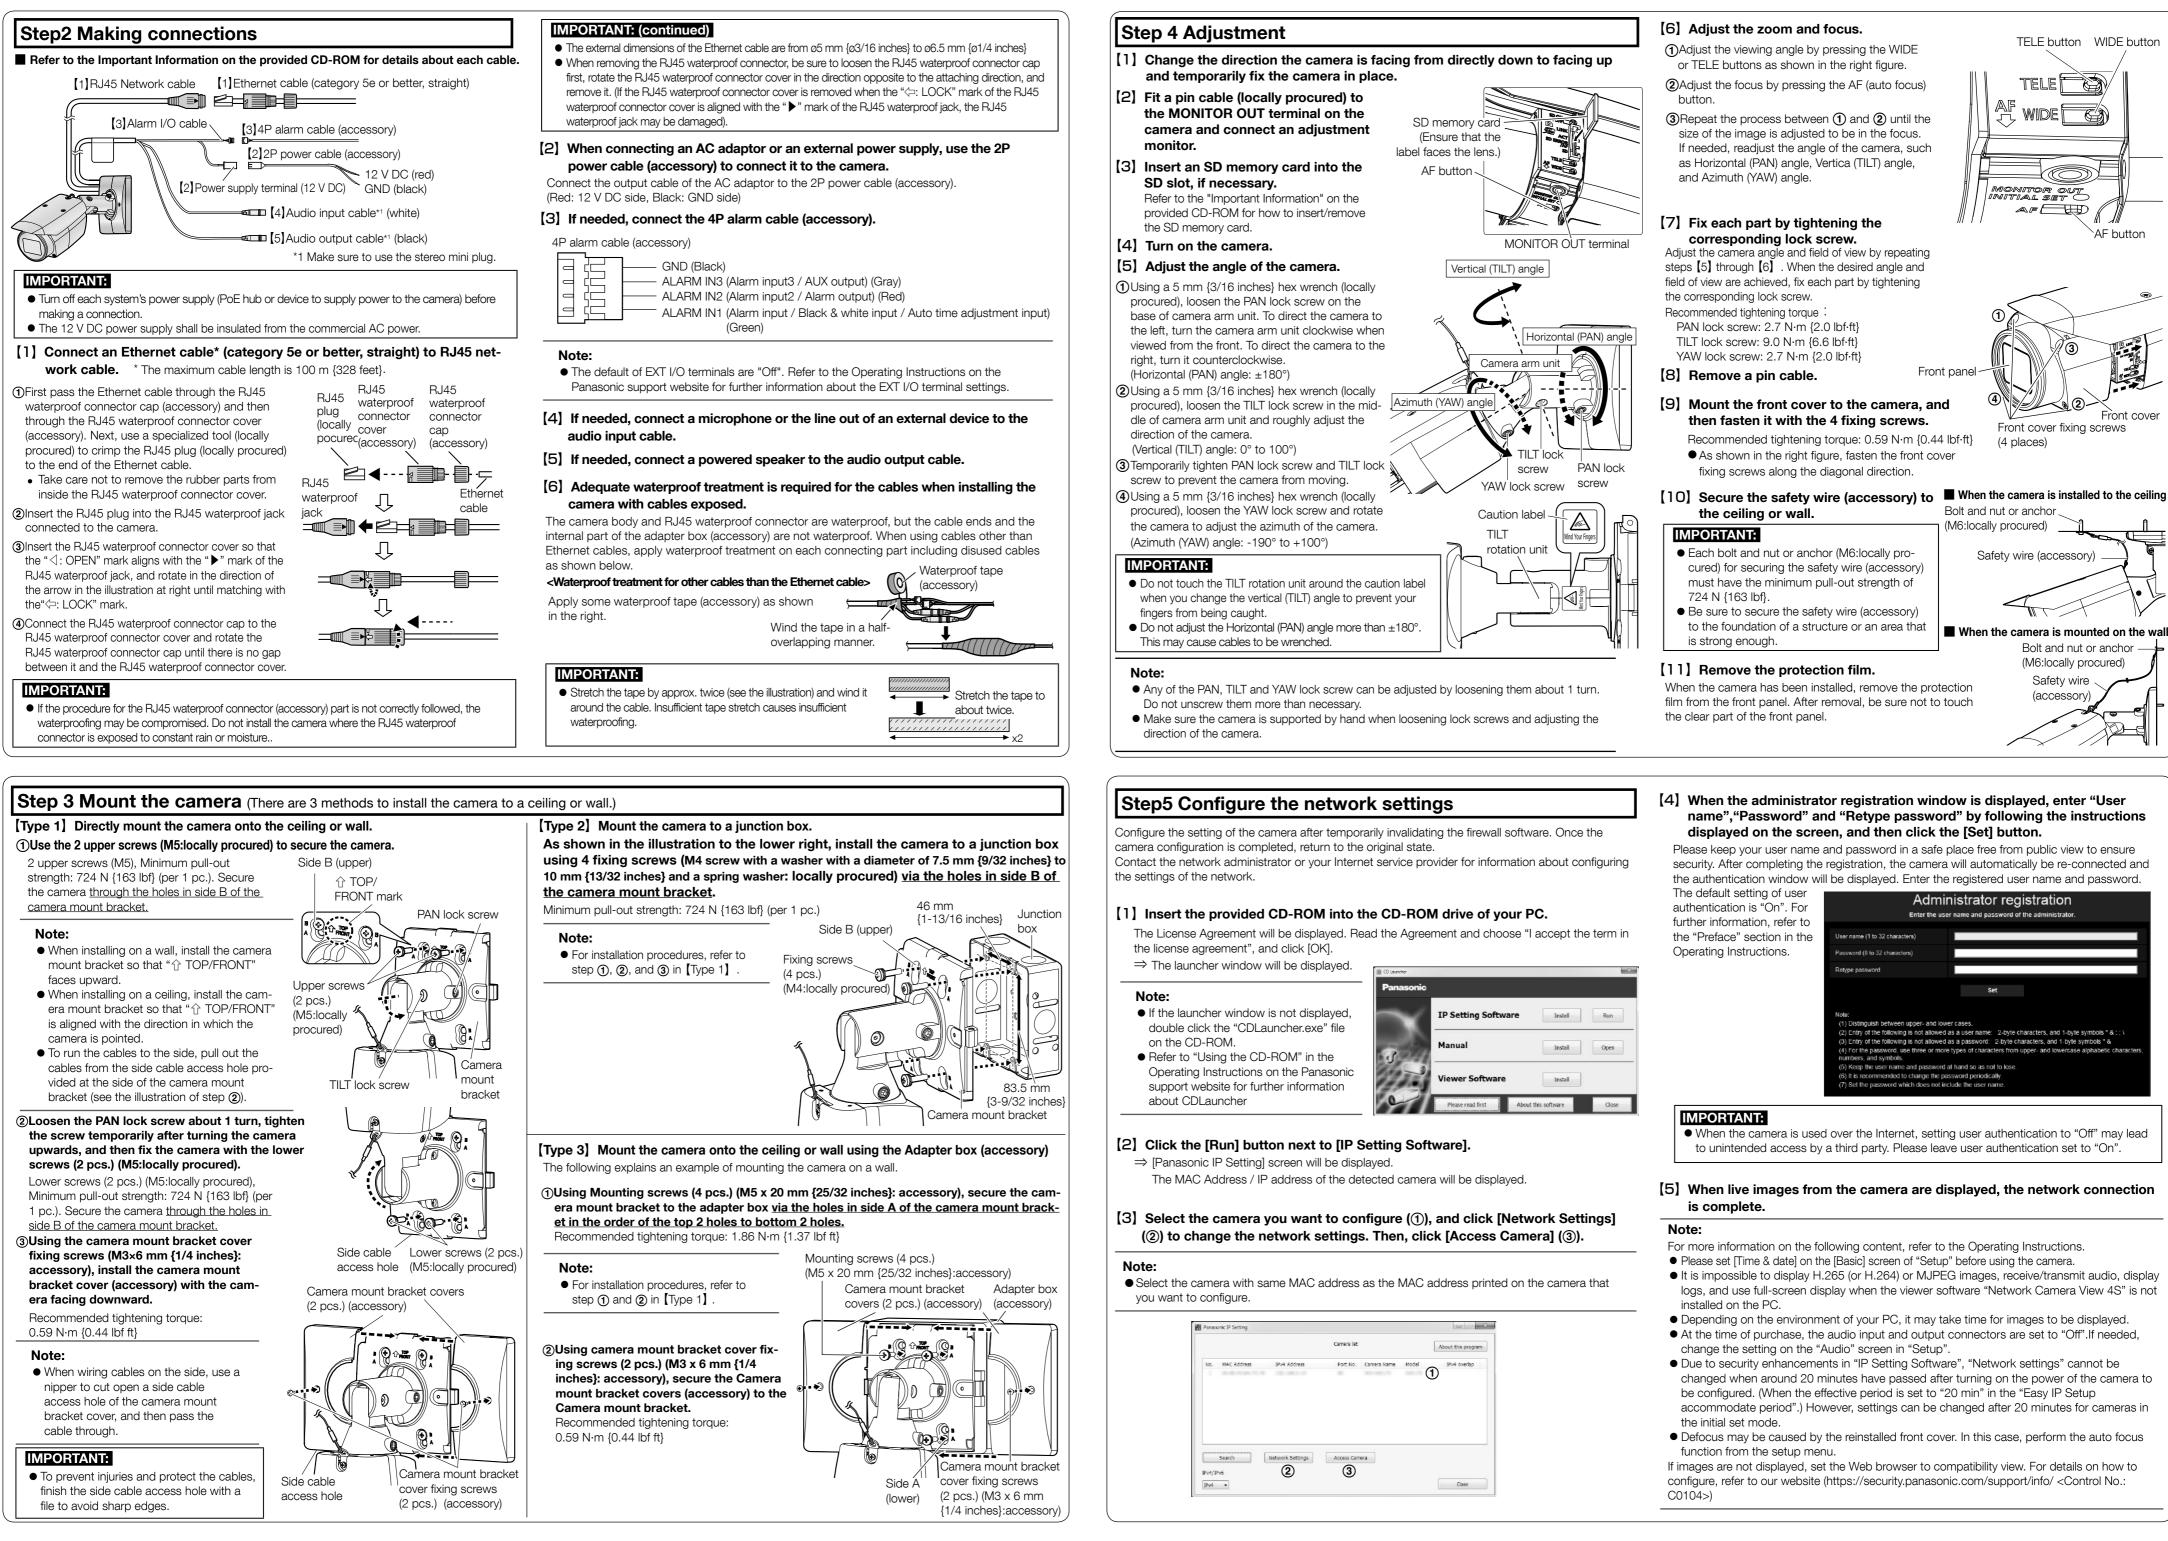

Panason			
	IP Setting Software	Install	Run
	Manual	Install	Open
1220	Viewer Software	Install	
0	Please read first About	t this software	Close

			Camera list			About this program
No.	MAC Address	IPv4 Address	Port No.	Camera Name	Model	IPv4 overlap
	100000000	1 100,000,0.0			(U
			-			
	Search	Network Settings	Access Carr	hera		
IPv4/J	Pv6	2	9			